


## GBBQ60IPHP5005XS

### 5MP Bullet IP Camera (5X Motor Zoom, Auto Focus Lens)

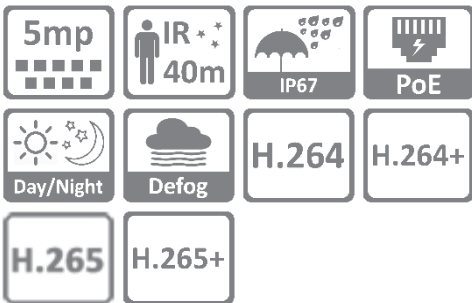

#### **FEATURES:**

- IR LED: 42μ x 4PCS
- IR range: 40M
- Image Sensor: 1/2.8" Starvis Back-illuminated CMOS Sensor
- Lens: 2.7-13.5mm Motor Zoom Auto Focus Lens
- Housing: Metal IP67
- Size: 211(W) x 92(H) x 90(D)mm
- Weight: 1.4Kg



## ➤ Datasheet

Camera	
Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS sensor
Image Resolution	5MP
Effective Pixels	2616(H)*1964(V)
Compression	H.265+/H.265/H.264+/H.264/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/25-1/10000Sec
Minimum Illumination	Color: 0.01Lux 0Lux with IR on
S/N Ratio	≥52dB
Scanning System	Progressive Scan
Video Output	Network
Reset Button	Optional
Lens	
Focus Length	Board Lens 2.7mm - 13.5mm (5X Motor Zoom AF Lens)
Focus Control	Auto
Lens Type	Motorized
Pixels	5M
Night Vision	
Infrared LED	42μ x 4PCS
Infrared Distance	40M
IR Status	Support Smart IR Auto Control
IR Power On	Smart IR Auto Control
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP,ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, IPv4/IPv6, RTP, RTSP, RTCP, NTP, UDP, SMTP

ONVIF	Support ONVIF 2.4
P2P	Support P2P (Support QR Code)
PoE	Internal PoE, Support IEEE 802.3af
Video Delay	0.3S (Within the Lan)
Main Stream 1	2592*1944@20fp 2560*1920@20fp
Main Stream 2	2560*1440@25fp
Main Stream 3	1920*1080@30fps 1280*720@30fps
Sub Stream 1	720*480@20fps 720*480@30fps
Sub Stream 2	/
Sub Stream 3	/
Tri Stream	352*288@20fps 352*288@30fps
IE Brower	IE8-11, Google Chrome, Firefox, Safari, Mac Safari
Smart Phone	iPhone, iPad, Android, Android Pad
<b>Camera Features</b>	
Starlight	/
Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK( Flicker Control), Video Tampering
Corridor Pattern	Support
Defog Mode	Support Defog
ROI	Support ROI
BLC Mode	Support BLC/HLC
HDR	/
WDR	Support WDR Up to 120dB
Noise Reduction	Support 3D NR

Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/NAS/CMS/Web
Language	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands
<b>Interface</b>	
Audio	Optional
Alarm	/
SD Card Slot	Yes, Support Max 512GB
RS485	/
<b>General</b>	
Housing	IP67
Vandal Resistance	IK10
Bracket	YES
IR Cut Filter	YES
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 950mA
Dimension	211(W) x 92(H) x 90(D)mm
Weight	1.4kgs

➤ **Dimensions**

