


GDSL20IPHP200S28

2MP Dome IP Camera (Fixed Lens)

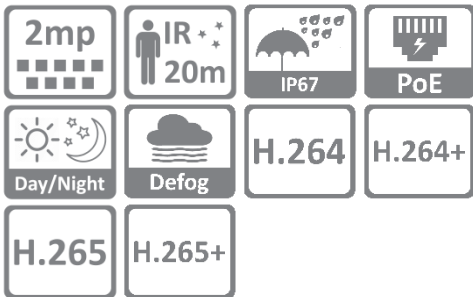

FEATURES:

IR LED: 14 μ x 18PCS
IR range: 20M
Image Sensor: 1/2.9" CMOS Sensor
Lens: 2.8mm Lens
Housing: Metal IP67
Size: ϕ 94.5 x 76(H)mm
Weight: 450g

CE FC RoHS



➤ Datasheet

Camera	
Image Sensor	1/2.9" SONY Low illumination CMOS Sensor
Image Resolution	2MP
Effective Pixels	1985(H)*1105(V)
Compression	H.265+/H.265/H.264+/H.264/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/25-1/10000Sec
Minimum Illumination	0.01Lux
S/N Ratio	≥52dB
Scanning System	Progressive Scan
Video Output	Network
Reset Button	Optional
Lens	
Focus Length	Board Lens 2.8mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	3MP
Night Vision	
Infrared LED	14μ x 18PCS
Infrared Distance	20M
IR Status	Support Smart IR Auto Control
IR Power On	Smart IR Auto Control
Network	
Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP,ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP

ONVIF	Support ONVIF 2.4
P2P	Support P2P (Support QR Code)
PoE	Internal PoE, Support IEEE 802.3af
Video Delay	0.3S (Within the Lan)
Main Stream 1	1920*1080@30fps
Main Stream 2	1280*720@30fps
Main Stream 3	/
Sub Stream 1	720*480@30fps
Sub Stream 2	/
Sub Stream 3	/
Tri Stream	352*288@30fps
IE Brower	IE8-11, Google Chrome, Firefox, Safari, Mac Safari
Smart Phone	iPhone, iPad, Android, Android Pad

Camera Features

Starlight	/
Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, FLK(Flicker Control)
Corridor Pattern	Support
Defog Mode	Support Defog
ROI	/
BLC	Support BLC
HDR	/
WDR	Support WDR
Noise Reduction	Support 3D NR
Motion Detection	Support
Privacy Masking	3 Rectangular Zone

Recording Mode	NVR/NAS/CMS/Web
Language	English, Bulgarian, Polish, Farsi, Chinese Simplified, Chinese Traditional German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Netherlands
Interface	
Audio	Optional
Alarm	/
SD Card Slot	Yes, Support Max 128GB
RS485	/
General	
Housing	IP67
Bracket	/
IR Cut Filter	YES
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 750mA
Dimension	Φ 94.5 x 76(D)mm
Weight	450gs

➤ **Dimensions**

